



RECESS MOUNTED MIRROR OPTIC LUMINAIRE SINGLE PARABOLIC

RML

MATERIAL SPECIFICATION

Description

Material & Finish

1. Housing


Fabricated from CRCA Sheet steel, white epoxy Powder coated.

2. Mirror Assembly

High purity aluminium, bright anodized, anti iridescence.

3. Cross Louvres

High purity aluminium, bright anodized, anti iridescence.

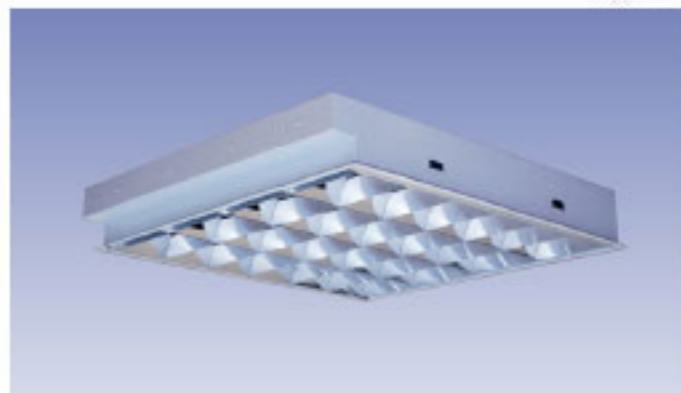

6. Terminal connector
3 Way, 6A, suitable for 6 Sqmm cable.

7. Capacitor
Metalised polypropylene capacitor.
(in case of HPF)

version of the above product can also be offered.

APPLICATIONS

Used for all economical energy saving lighting installation for medium visual requirements, such as offices, sales & display areas, also for banking & counter halls, hotels, restaurants & living rooms etc.

OTHER FEATURES

1. Cable entry
Through 20mm knockout.

2. Mounting system
Suitable for recess mounting on 600 x 600mm 'T' type of false ceiling.

3. Maintenance
4 springs anchoring system facilitates easy removal for maintenance operations.

4. Degree of protection
IP20.

OPTIONS

HPF, extra low ballast, electronic ballast, dimmable ballast, emergency power pack, silicon insulated wiring, custom made

ACCESSORIES

1. Ballast

Vacuum pressure impregnated type.

2. Lamp Holder

Push fit type, body made of heat resistant polycarbonate & rotor of extremely high heat resistant PBT.

3. Starter Holder

Push fit type, made of heat resistant polycarbonate.

4. Starter

Glow type starter.

5. Internal wiring

PVC insulated, heat resistant solid conductor.



RECESS MOUNTED MIRROR OPTIC LUMINAIRE SINGLE PARABOLIC



MODEL	TYPE	No of Lamps	A	B	C
BSRML120	FTL 18/20W	1	610	180	90
BSRML220	FTL 18/20W	2	620	310	90
BSRML140	FTL 36/40W	1	1210	190	90
BSRML240	FTL 36/40W	2	1220	310	90
BSRML420/10	FTL36/40W	4	595	595	90
BSRML420/15	FTL36/40W	4	605	605	90
BSRML420/25	FTL36/40W	4	620	620	90
BSRML440/10	FTL 36/40W	4	1195	595	90
BSRML440/25	FTL 36/40W	4	1220	620	90
BSRML265	FTL 58/65W	2	1520	310	90

Single Parabolic Louvres - four lamps

