

## MIRROR LIGHT


### MATERIAL SPECIFICATION

Description Material & Finish

1. Housing  
Plastic Body.
2. Diffuser  
Polycarbonated.

### ACCESSORIES

1. Ballast  
Vacuum pressure impregnated type.
2. Lamp Holder  
Push fit type, body made of heat resistant polycarbonate & rotor of extremely high heat resistant PBT.
3. Starter Holder  
Push fit type, made of heat resistant polycarbonate.
4. Starter  
Glow type starter.
5. Internal wiring  
PVC insulated, heat resistant solid conductor.

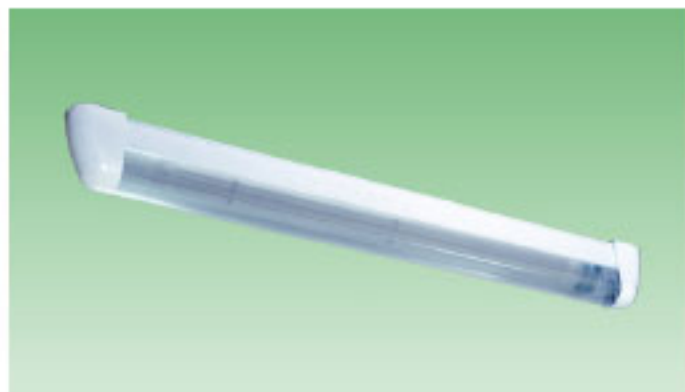

6. Terminal connector  
3 Way, 6A, suitable for 6 Sqmm cable.
7. Capacitor  
Metalised polypropylene capacitor.  
(in case of HPF)

### OPTIONS

HPF, extra low ballast, electronic ballast, dimmable ballast, emergency power pack, silicon insulated wiring.

### OTHER FEATURES

1. Cable entry  
Through 20mm knockout.
2. Mounting system  
Suitable for surface mounting.

### APPLICATIONS

This is general purpose luminaire, suitable for use in dressing rooms, bathrooms

MODEL	TYPE	No of Lamps	L	W	H
BSET06	1X6W	1	244	42	76
BSET0	1X8W	1	320	42	76
BSET13	1X13W	1	549	42	76
BSET15	1X15W	1	472	42	76
BSET18	1X18W	1	625	42	76
BSET30	1X30W	1	930	42	76
BSET36	1X36W	1	1235	42	76
BSET58	1X58W	1	1535	42	76