



BATTEN FITTINGS WITH REFLECTOR

MATERIAL SPECIFICATION

Description
Material & Finish.

- Housing**
Fabricated from CRCA sheet steel, white epoxy powder coated.
- Reflector**
CRCA sheet steel, Epoxy powder coated.

ACCESSORIES

- Ballast**
Vacuum pressure impregnated type.
- Lamp Holder**
Push fit type, body made of heat resistant polycarbonate & rotor of extremely high heat resistant PBT.
- Starter Holder**
Push fit type, made of heat resistant polycarbonate.
- Starter**
Glow type starter.
- Internal wiring**
PVC insulated, heat resistant solid conductor.
- Terminal connector**
3 Way, 6A, suitable for 6 Sqmm cable.
- Capacitor**
Metalised polypropylene capacitor.
(in case of HPF)

OTHER FEATURES

- Cable entry**
Through 20mm knockout.
- Mounting system**
Suitable for surface mounting.
- Degree of protection**
IP20.

OPTIONS

HPF, extra low ballast, electronic ballast, dimmable ballast, emergency power pack, silicon insulated wiring.

Different types of batten fittings:

- 1) Batten with single sided reflector.
- 2) Batten with double sided reflector.



APPLICATIONS

General purpose Batten
This is general purpose luminaire, suitable for use in shops, supermarkets, schools, factories, workshops, stores etc.

Batten with single sided reflector
Chalkboards in schools, notice boards, electrical control rooms, supermarket shelves & areas requiring good vertical surface illumination


Batten with Double sided reflector
For cost effective lighting of working areas with low to medium visual requirements, such as in sheet metal processing areas, industrial sheds, workshops, assembly plants, stores, warehouses etc.

BBR

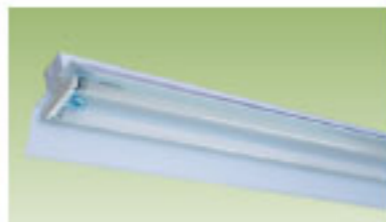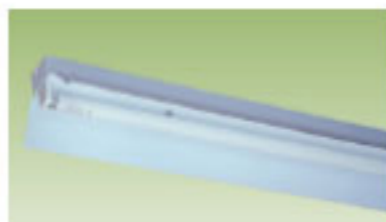

Batten With Double Sided Reflector

MODEL	TYPE	No of Lamps	A	B	C
BSB8RD120	FTL18/20W	1	620	220	100
BSB8RD140	FTL36/40W	1	1220	220	100
BSB8RD165	FTL58/65W	1	1520	220	100
BSB8RD220	FTL18/20W	2	620	220	100
BSB8RD240	FTL36/40W	2	1220	220	100
BSB8RD265	FTL58/65W	2	1520	220	100

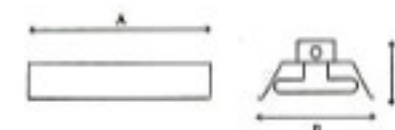

Batten with single sided reflector

MODEL	TYPE	No of Lamps	A	B	C
BSB8RS120	FTL18/20W	1	620	110	100
BSB8RS140	FTL36/40W	1	1220	110	100
BSB8RS165	FTL58/65W	1	1520	110	100

