

IP 41

SPLIT TYPE DISTRIBUTION BOARDS
(PLUG IN TYPE)

TP&N

TPN split Plug in Distribution boards are available in various designations and can be customized as required. Our Basic colours are White & Grey, optional colours can be provided as required.

BSLI MCB Distribution Board


arranged with:

- Three phase 415V 50Hz AC Supply.
- MCB's are SP,DP&TP.
- Power and Lighting Section splitted by separate ELCB and Interior.
- Interior with Copper tinned coated busbar.
- Busbar rated for 150 amps.
- Surface or Flush mounted.
- Ambient temperature 50°C.

Cabling and Installation:

- Comprehensive cable entry facilities.
- Ease of Installation, cabling & maintenance.
- Universal fixing facilities.
- Neutral bars are mounted on a separate insulator.
- Sufficient space for cable/wires

Various brands & Rating of Isolators, ELCB's, MCB's can be provided as per our stock availability.
IP 65 can be manufactured as required.

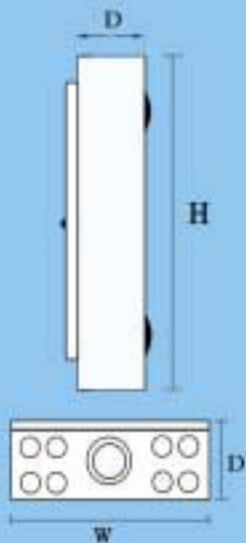

ITEM	Busbar Rating	TPN Split	Incomer Isolator	Lighting ELCB 300mA	Power ELCB 30mA	Width mm	Height mm	Depth mm
1	150A	2+2W	100A	63A	63A	355	540	85
2	150A	4+2W	100A	63A	63A	355	610	85
3	150A	4+4W	100A	63A	63A	355	700	85
4	150A	6+2W	100A	63A	63A	355	700	85
5	150A	6+4W	100A	63A	63A	355	760	85
6	150A	6+6W	100A	63A	63A	355	850	85
7	150A	8+2W	100A	63A	63A	355	760	85
8	150A	8+4W	100A	63A	63A	355	850	85
9	150A	8+6W	100A	63A	63A	355	930	85
10	150A	8+8W	100A	63A	63A	355	1000	85
11	150A	10+2W	100A	63A	63A	355	850	85
12	150A	10+4W	100A	63A	63A	355	930	85
13	150A	10+6W	100A	63A	63A	355	1000	85
14	150A	12+2W	100A	63A	63A	355	930	85
15	150A	12+4W	100A	63A	63A	355	1000	85
16	150A	12+6W	100A	63A	63A	355	1080	85
17	150A	12+8W	100A	63A	63A	355	1150	85